

BS 4808 0.22mm²



Product Code: BS 4808 0.22mm²

Product Description

Reference Standard
Customer's sample spec. and the general standard

Multi-construction
1

Cable Construction

Conductor	Tinned Copper
square(mm ²)	0.22
Construction	T0.2±0.008×7
Standard Dia.(mm)	0.60

Insulation


Insulation	PVC
Thickness	0.3
Insulation Dia.(±0.1mm)	1.20
Insulation Color	According to the customer

Marking
According to the customer

Revision History

A0-1

Design

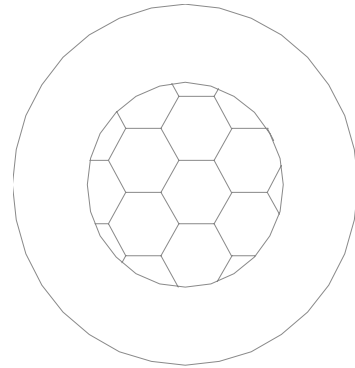

Electrical Characteristics

Max. Conductor DC Resistance at 20 °C (Ω /Km)	<86.2
Min. Insulation DC Resistance at 20 °C (MΩ *Km)	200
Rated Temperature(°C)	85
Rated Voltage (V)	1000

RoHS GUIDELINE			
We operate according to the following standards			
Control Item	Standard	Testing Method	Testing Equipment
Cadmium content (Cd)	<0.01%	EN1122	ICP-AES
Lead content (Pb)	<0.1%	EPA3050B	ICP-AES
Mercury content (Hg)	<0.1%	EPA3052	ICP-AES
Chromium (VI) content	<0.1%	EPA3060(UN-VIS)	ICP-AES
Polybrominated Biphenyls(PBB)	Forbidden	GC/MS	/
Polybrominated Diphenyl Ether (PBDE)	Forbidden	GC/MC	/

	Date: 2008-08-06
	Page: 1 / 1